
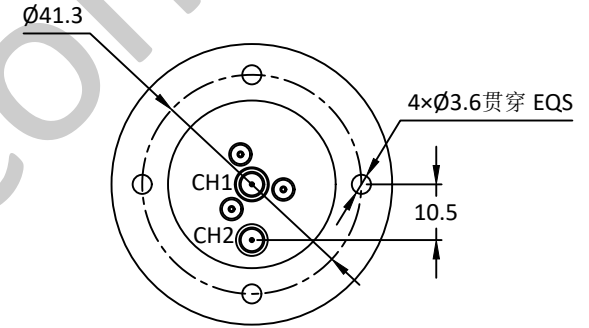
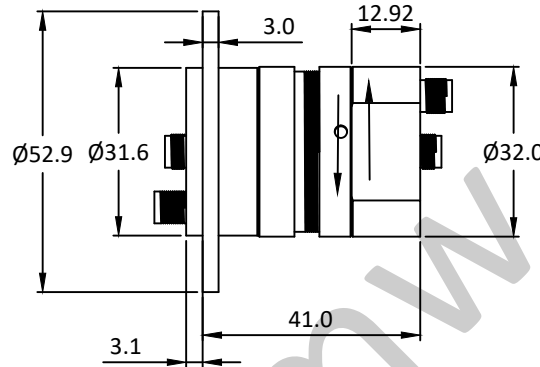


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

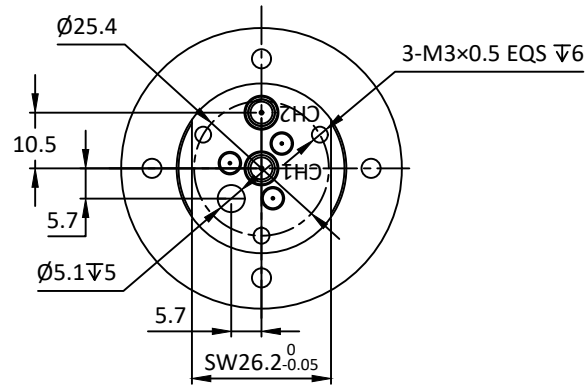

LRJ-1018


双通道旋转关节 Dual Channel Rotary Joint

—电气技术参数 Electrical Specifications—


通道 Channel:	CH1	CH2
工作频率 Frequency Range:	DC - 4.5GHz	DC - 4.5GHz
插入损耗 Insertion Loss:	0.3dB(Max)	0.6dB(Max)
插入损耗最大波动值:	0.1dB	0.15dB
电压驻波比 VSWR:	1.3(Max)	1.5(Max)
驻波比最大波动值:	0.1	0.1
耐功率 Power:	100W(CW) 1kW(Peak)	10W(CW) 1kW(Peak)
工作温度 Operation Temperature:	-40~+70°C	
存储温度 Storage Temperature:	-55~+85°C	
转动速度 Speed:	30rpm(Max)	
寿命 Life:	5*10 ⁶ 转(Min)	

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-F
样式 Type:	I
重量 Weight:	130g



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.XX±0.1 ±1' ±2/5
.XXX±0.012



Approvals	DATE
DRWN	
ENG	
CHK	
Q.A.	

莱尔微波
www.lairmw.com sales@lairmw.com

P/N: LRJ-1018

DUAL CHANNEL COAX ROTARY JOINT
双通道同轴旋转关节

SIZE	CAGE NO	DWG NO.	REV
A3			1
SCALE 3:2	UNIT mm	SHEET 1 OF 1	

HOLE DIAMETER	TOLERANCES
.35 TO 3.20	+05/-02
3.21 TO 6.35	+10/-03
6.36 TO 12.70	+15/-03
12.71 TO 19.05	+20/-03
19.06 TO 25.40	+25/-03
25.41 TO 50.80	+30/-03