

NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LRJ-1019



双通道旋转关节 Dual Channel Rotary Joint

—电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2
工作频率 Frequency Range:	DC - 5GHz	DC - 16GHz
插入损耗 Insertion Loss:	0.5dB@DC-5GHz	0.3dB@DC-6GHz 0.6dB@6-16GHz
插入损耗最大波动值:	0.3dB	0.06dB
电压驻波比 VSWR:	1.5@DC-5GHz	1.3@DC-6GHz 1.4@6-12GHz 1.6@12-18GHz
驻波比最大波动值:	0.2	0.2
耐功率 Power:	10W(CW)@1GHz 1kW(Peak)	100W@DC-2GHz 60W@2-4GHz 35W@4-8GHz 25W@8-12GHz 17W@12-16GHz 1kW(Peak)
工作温度 Operation Temperature:	-40~+70 C	
存储温度 Storage Temperature:	-55~+85 C	
转动速度 Speed:	30rpm(Max)	
寿命 Life:	5*10 ⁶ 转(Min)	

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-F@CH1&2
样式 Type:	L
重量 Weight:	130g

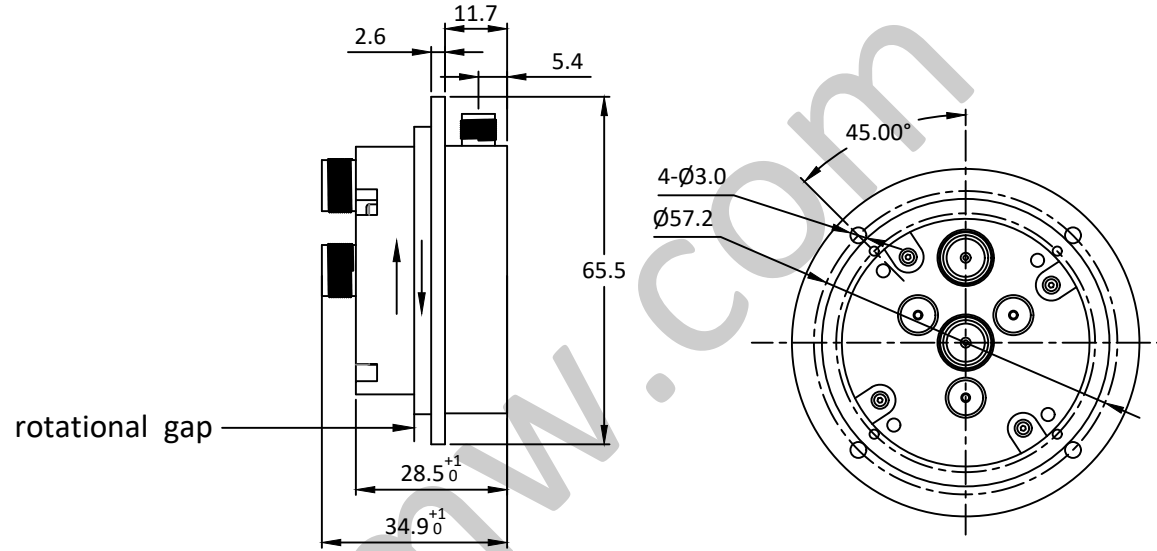

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 .XXX±0.012			莱尔微波 www.lairmw.com sales@lairmw.com		P/N: LRJ-1019		
			Approvals	DATE	DUAL CHANNEL COAX ROTARY JOINT 双通道同轴旋转关节		
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	ENG	CHK	Q.A.	DATE	
			SIZE	A3	CAGE NO	DWG NO.	REV
			SCALE	3:2	UNIT	mm	1
			SHEET 1 OF 1				