


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

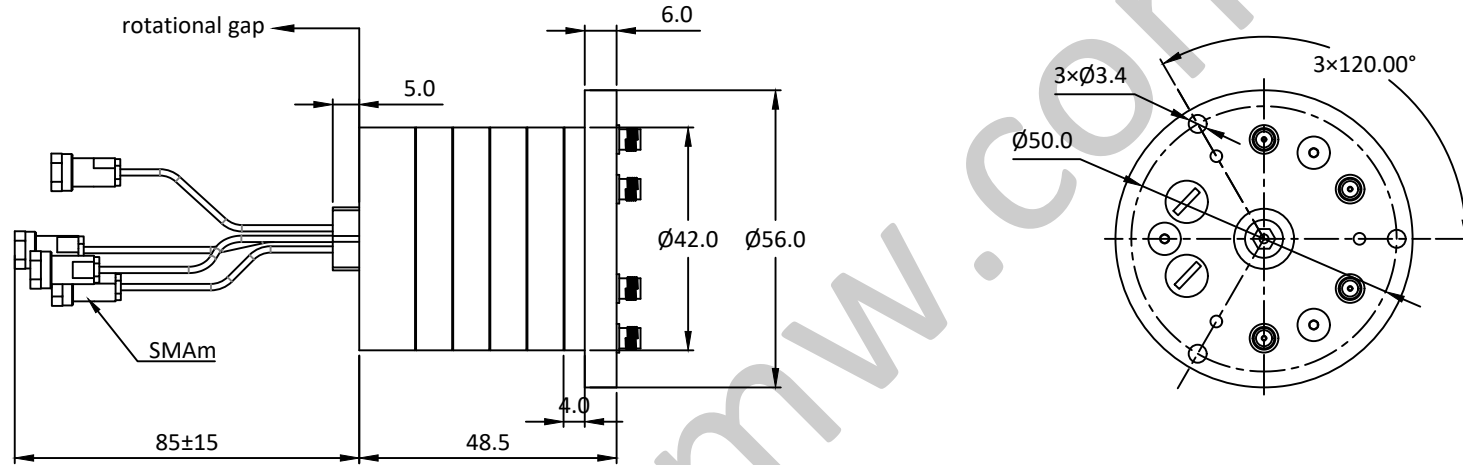

LRJ-1031

4通道旋转关节 Four Channel Rotary Joint

—电气技术参数 Electrical Specifications—

通道 Channel:	CH1-4
工作频率 Frequency Range:	DC- 3GHz
插入损耗 Insertion Loss:	0.7dB@DC-2.5GHz/1.0@2.5-3.0GHz
插入损耗最大波动值:	0.2dB@DC-2.5GHz/0.5dB@2.5-3.0GHz
电压驻波比 VSWR:	1.7@DC-2.5GHz/2.4@2.5-3.0GHz
驻波比最大波动值:	0.5@DC-2.5GHz/1.0@2.5-3.0GHz
耐功率 Power	50W@DC-1.0GHz/35W@1.0-2.5GHz/25W@2.5-3.0GHz(CW)
	1kW(Peak)
工作温度 Operation Temperature:	-40~+85°C
存储温度 Storage Temperature:	-55~+85°C
转动速度 Speed:	60rpm(Max)
寿命 Life:	1*10 ⁶ 转(Min)

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-M/F
样式 Type:	I
重量 Weight:	210g

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LRJ-1031											
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +05/-02 +10/-03 +15/-03 +20/-03 +25/-03 +30/-03		<table border="1"> <tr> <td>Approvals</td> <td>DATE</td> </tr> <tr> <td>DRWN</td> <td></td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		Approvals	DATE	DRWN		ENG		CHK		Q.A.		FOUR CHANNEL COAX ROTARY JOINT 4通道同轴旋转关节	
Approvals	DATE																
DRWN																	
ENG																	
CHK																	
Q.A.																	
SIZE A3		CAGE NO		DWG NO.		REV 1											
SCALE 3:2		UNIT mm		SHEET 1 OF 1													