


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
		ENGINEERING RELEASE			

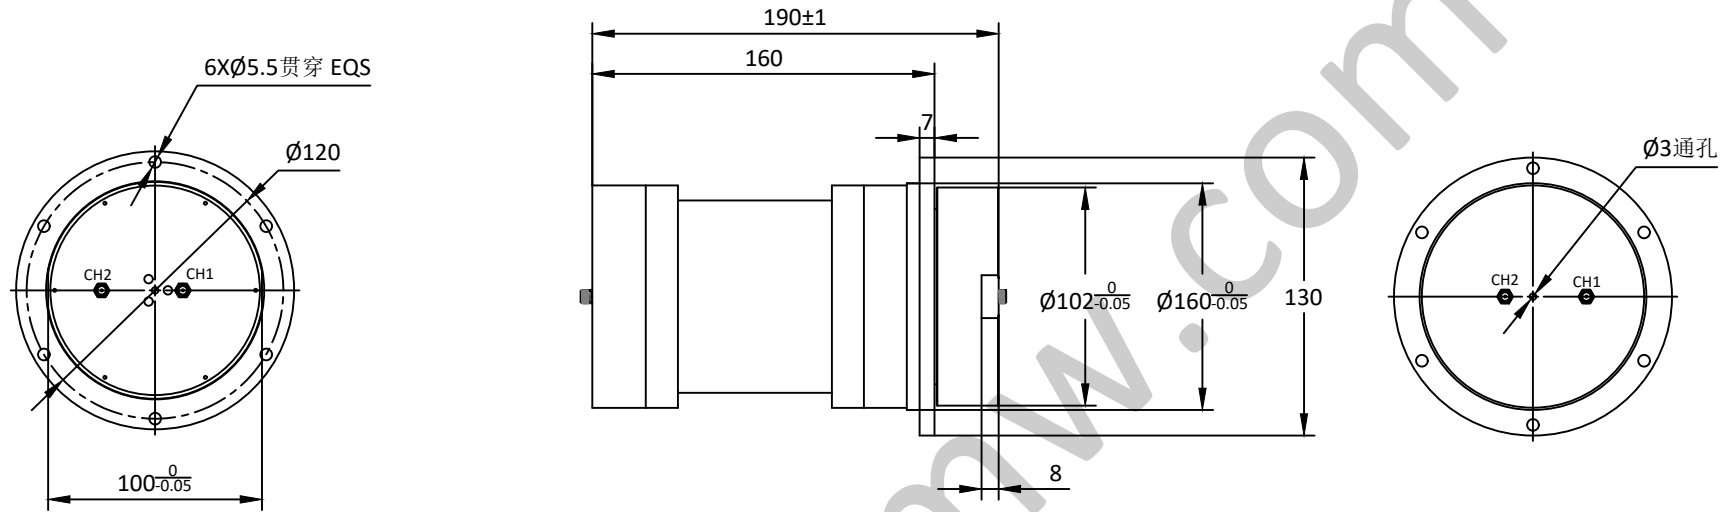

LRJ-1077

双通道旋转关节 Dual Channel Rotary Joint


—电气技术参数 Electrical Specifications—



通道 Channel:	CH1	CH2
工作频率 Frequency Range:	0.8 - 0.9GHz	1.2 - 1.4GHz
插入损耗 Insertion Loss:	1.0dB(Max)	1.0dB(Max)
插入损耗最大波动值:	0.15dB	0.15dB
电压驻波比 VSWR:	1.5(Max)	1.5(Max)
驻波比最大波动值:	0.2	0.2
耐功率 Power:	50W(CW)	50W(CW)
	/	/

工作温度 Operation Temperature:	-40~+70°C
存储温度 Storage Temperature:	-55~+85°C
转动速度 Speed:	30rpm(Max)
寿命 Life:	5*10 ⁶ 转(Min)

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-F
样式 Type:	/
重量 Weight:	3kg

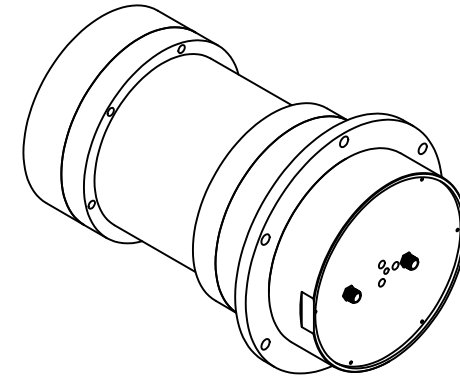

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.012			 莱尔微波 Laird Microwave www.lairmw.com sales@lairmw.com	P/N: LRJ-1077			
	Approvals	DATE		DUAL CHANNEL COAX ROTARY JOINT 双通道同轴旋转关节			
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/-0.2 +.10/-0.3 +.15/-0.3 +.20/-0.3 +.25/-0.3 +.30/-0.3	DRWN	ENG	CHK	Q.A.		
		SIZE	A3	CAGE NO	DWG NO.	REV	1
		SCALE	3:2	UNIT	mm	SHEET 1 OF 1	