


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
		ENGINEERING RELEASE			

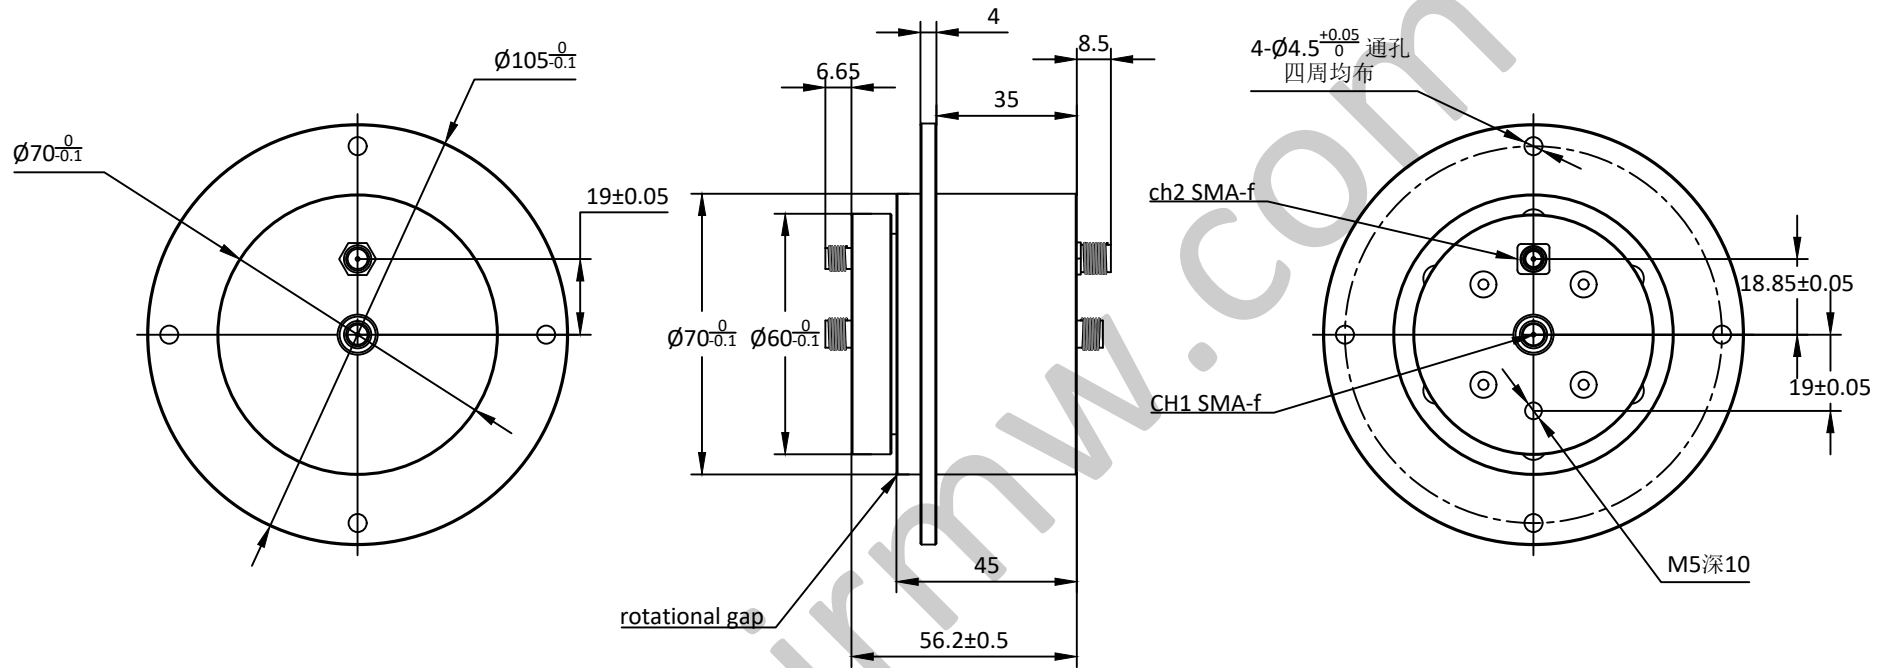

LRJ-1076

双通道旋转关节 Dual Channel Rotary Joint

—电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2
工作频率 Frequency Range:	9 - 9.5GHz	9 - 9.5GHz
插入损耗 Insertion Loss:	0.8dB(Max)	0.8dB(Max)
插入损耗最大波动值:	0.05dB	0.05dB
电压驻波比 VSWR:	1.35(Max)	1.35(Max)
驻波比最大波动值:	0.05	0.05
耐功率 Power:	60W@9GHz(CW) 300W(Peak)	60W@9GHz(CW) 300W(Peak)

工作温度 Operation Temperature: -40~+70°C


存储温度 Storage Temperature: -55~+85°C

转动速度 Speed: 60/10rpm(Max)

寿命 Life: 5*10⁶转(Min)

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-F
样式 Type:	1
重量 Weight:	300g

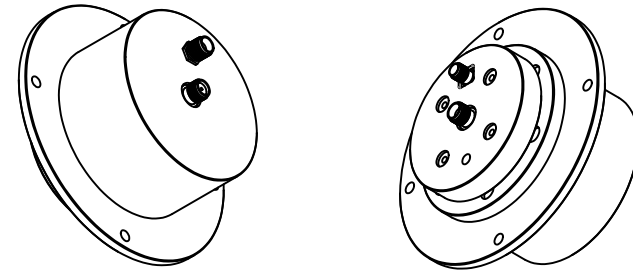

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012				P/N: LRJ-1076	
		www.lairmw.com sales@lairmw.com			
Approvals	DATE	DUAL CHANNEL COAX ROTARY JOINT 双通道同轴旋转关节			
DRWN		SIZE	CAGE NO	DWG NO.	REV
ENG		A3			1
CHK		SCALE	UNIT	SHEET 1 OF 1	
Q.A.		3:2	mm		