


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

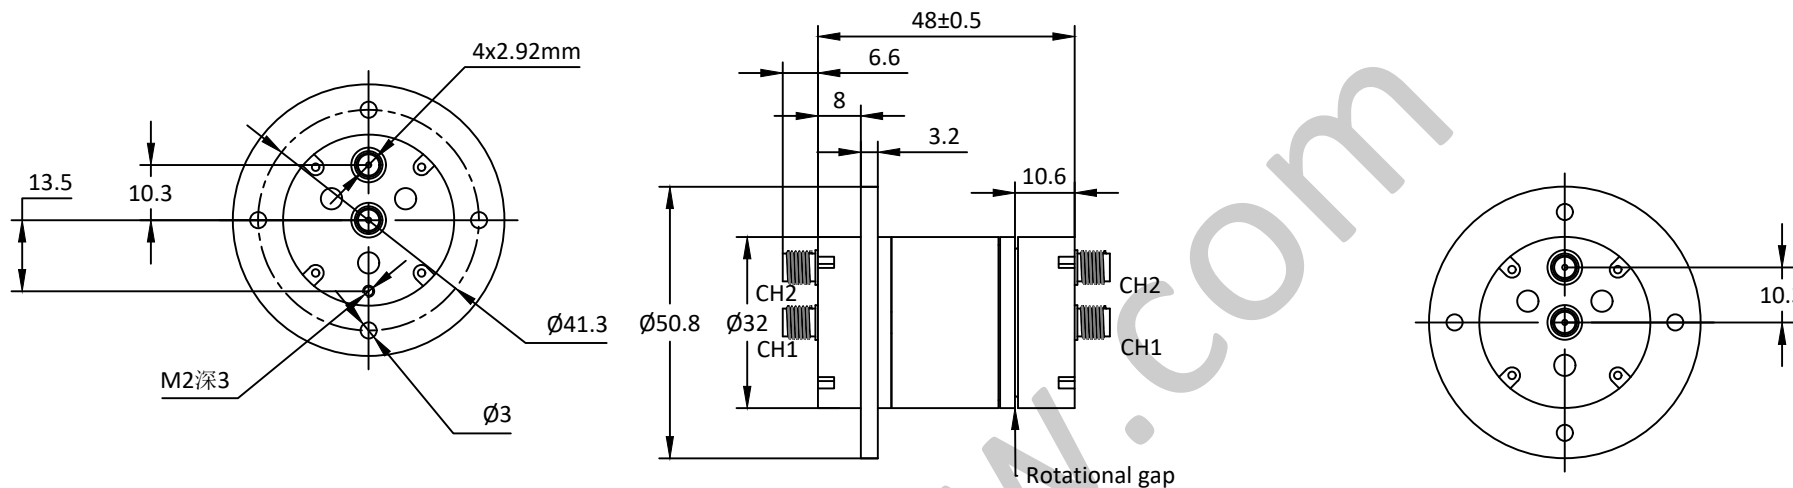

## LRJ-1073

双通道旋转关节 Dual Channel Rotary Joint

—电气技术参数 Electrical Specifications—

通道 Channel:

工作频率 Frequency Range:

插入损耗 Insertion Loss:

插入损耗最大波动值:

电压驻波比 VSWR:

驻波比最大波动值:

耐功率 Power:

工作温度 Operation Temperature:

存储温度 Storage Temperature:

转动速度 Speed:

寿命 Life:


—机械技术参数 Mechanical Specification—

接口 Connectors:

样式 Type:

重量 Weight:

	CH1	CH2
工作频率 Frequency Range:	DC - 40GHz	DC - 18GHz
插入损耗 Insertion Loss:	0.4dB@DC-8GHz 1.0dB@8-18GHz 1.5dB@18-32GHz 2dB@32-40GHz	0.75dB@DC-4GHz 1.5dB@4-8GHz 2.5dB@8-12GHz 3.0dB@12-18GHz
插入损耗最大波动值:	0.1dB@DC-18GHz 0.25dB@18-40GHz	0.1dB@DC-4GHz 0.3dB@4-8GHz 0.75dB@8-12GHz 1.5dB@12-18GHz
电压驻波比 VSWR:	1.35@DC-8GHz 1.5@8-18GHz 2.0@18-32GHz 2.5@32-40GHz	2@DC-4GHz 3@4-8GHz 3.5@8-12GHz 4.5@12-18GHz
驻波比最大波动值:	0.05@DC-18GHz 0.1@18-40GHz	0.1@DC-4GHz 0.35@4-8GHz 0.8@8-12GHz 2.0@12-18GHz
耐功率 Power:	10W(CW)@1GHz 2kW(Peak)	50W(CW)@1GHz 2kW(Peak)
工作温度 Operation Temperature:	-40~+70 °C	
存储温度 Storage Temperature:	-55~+85 °C	
转动速度 Speed:	50rpm(Max)	
寿命 Life:	1*10 <sup>6</sup> 转(Min)	
接口 Connectors:	2.92mm-F@CH1&2	
样式 Type:	I	
重量 Weight:	284g	

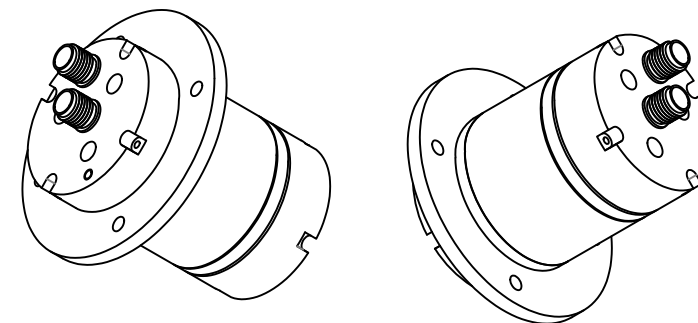

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012		 www.lairmw.com sales@lairmw.com	P/N: LRJ-1073				
			DUAL CHANNEL COAX ROTARY JOINT 双通道同轴旋转关节				
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +05/-02 +10/-03 +15/-03 +20/-03 +25/-03 +30/-03	DRWN	DATE	SIZE A3	CAGE NO	DWG NO.	REV 1
		ENG		SCALE 3:2	UNIT mm	SHEET 1 OF 1	
		CHK					
		Q.A.					