


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

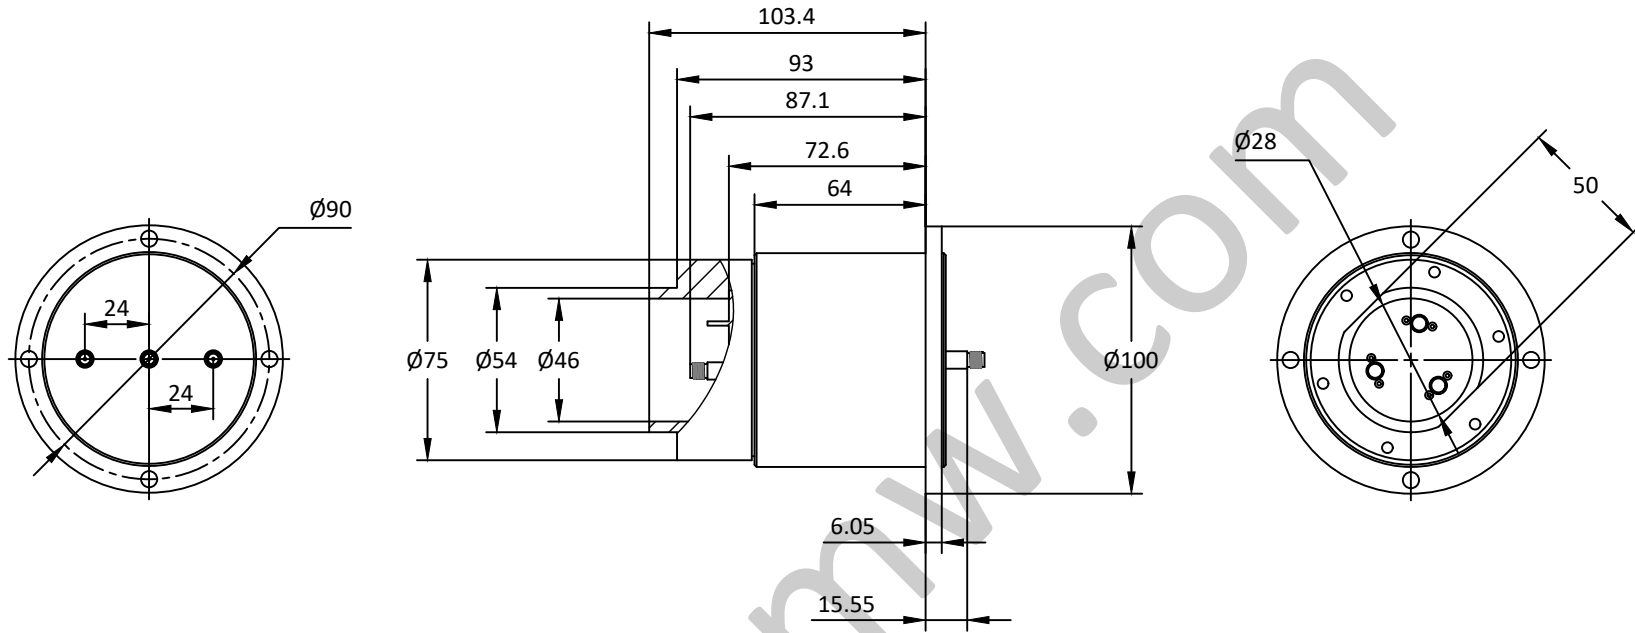

LRJ-1080


3通道同轴旋转关节 Three Channel Coax Rotary Joint



—电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2	CH3
工作频率 Frequency Range:	DC - 4GHz	DC - 4GHz	DC - 3GHz
插入损耗 Insertion Loss:	0.05dB(Max)	0.1dB(Max)	0.1dB(Max)
插入损耗最大波动值:	0.3dB	0.3dB	/
电压驻波比 VSWR:	1.35(Max)	1.5(Max)	1.5(Max)
驻波比最大波动值:	0.1	0.15	0.15
耐功率 Power:	100W(CW)	20W(CW)	30W(CW)
工作温度 Operation Temperature:	-40~+70°C		
存储温度 Storage Temperature:	-55~+85°C		
转动速度 Speed:	30rpm(Max)		
寿命 Life:	10 ⁶ 转(Min)		

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-F	SMA-F	SMA-F
样式 Type:	I	L	L
重量 Weight:	750g		

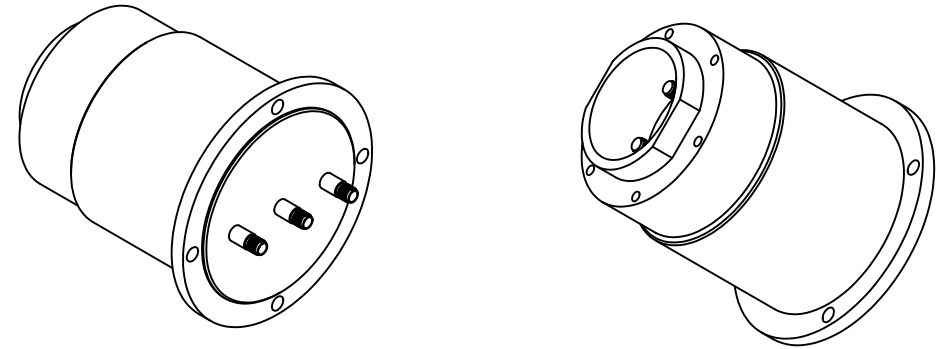

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012	 Approvals DATE	 www.lairmw.com sales@lairmw.com	P/N: LRJ-1080		
			THREE CHANNEL COAX ROTARY JOINT 3通道同轴旋转关节		
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03	DRWN		SIZE	A3
		ENG		CAGE NO	
		CHK		DWG NO.	
		Q.A.		REV	1
		SCALE	3:2	UNIT	mm
				SHEET 1 OF 1	