


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

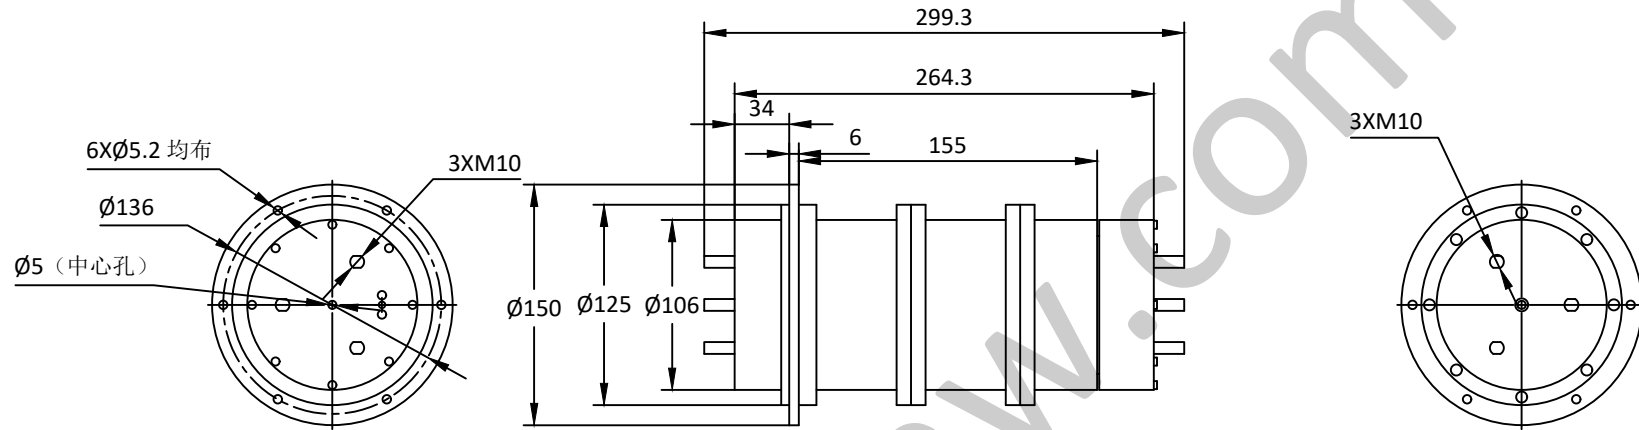

LRJ-1081


3通道同轴旋转关节 Three Channel Coax Rotary Joint

—电气技术参数 Electrical Specifications—

通道 Channel:	CH1-3
工作频率 Frequency Range:	1.2 - 1.65GHz
插入损耗 Insertion Loss:	0.5dB(Max)
插入损耗最大波动值:	0.15dB
电压驻波比 VSWR:	1.4(Max)
驻波比最大波动值:	0.2
耐功率 Power:	50W(CW) 15kW(Peak)
工作温度 Operation Temperature:	-40~+70°C
存储温度 Storage Temperature:	/
转动速度 Speed:	60rpm(Max)
寿命 Life:	5*10 ⁶ 转(Min)

—机械技术参数 Mechanical Specification—

接口 Connectors:	N
样式 Type:	/
重量 Weight:	295g

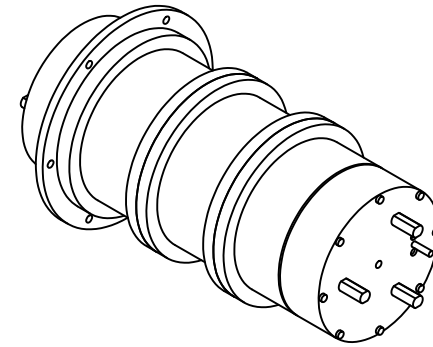

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.012				莱尔微波 www.lairmw.com sales@lairmw.com		P/N: LRJ-1081															
<table border="1"> <tr> <td>DRWN</td> <td>DATE</td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		DRWN	DATE	ENG		CHK		Q.A.		THREE CHANNEL COAX ROTARY JOINT 3通道同轴旋转关节		<table border="1"> <tr> <td>SIZE</td> <td>CAGE NO</td> <td>DWG NO.</td> <td>REV</td> </tr> <tr> <td>A3</td> <td></td> <td></td> <td>1</td> </tr> </table>		SIZE	CAGE NO	DWG NO.	REV	A3			1
DRWN	DATE																				
ENG																					
CHK																					
Q.A.																					
SIZE	CAGE NO	DWG NO.	REV																		
A3			1																		
<table border="1"> <tr> <td>HOLE DIAMETER</td> <td>TOLERANCES</td> </tr> <tr> <td>.35 TO 3.20</td> <td>+0.05/-0.02</td> </tr> <tr> <td>3.21 TO 6.35</td> <td>+0.10/-0.03</td> </tr> <tr> <td>6.36 TO 12.70</td> <td>+0.15/-0.03</td> </tr> <tr> <td>12.71 TO 19.05</td> <td>+0.20/-0.03</td> </tr> <tr> <td>19.06 TO 25.40</td> <td>+0.25/-0.03</td> </tr> <tr> <td>25.41 TO 50.80</td> <td>+0.30/-0.03</td> </tr> </table>		HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+0.05/-0.02	3.21 TO 6.35	+0.10/-0.03	6.36 TO 12.70	+0.15/-0.03	12.71 TO 19.05	+0.20/-0.03	19.06 TO 25.40	+0.25/-0.03	25.41 TO 50.80	+0.30/-0.03	SCALE 3:2		UNIT mm		SHEET 1 OF 1	
HOLE DIAMETER	TOLERANCES																				
.35 TO 3.20	+0.05/-0.02																				
3.21 TO 6.35	+0.10/-0.03																				
6.36 TO 12.70	+0.15/-0.03																				
12.71 TO 19.05	+0.20/-0.03																				
19.06 TO 25.40	+0.25/-0.03																				
25.41 TO 50.80	+0.30/-0.03																				