


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

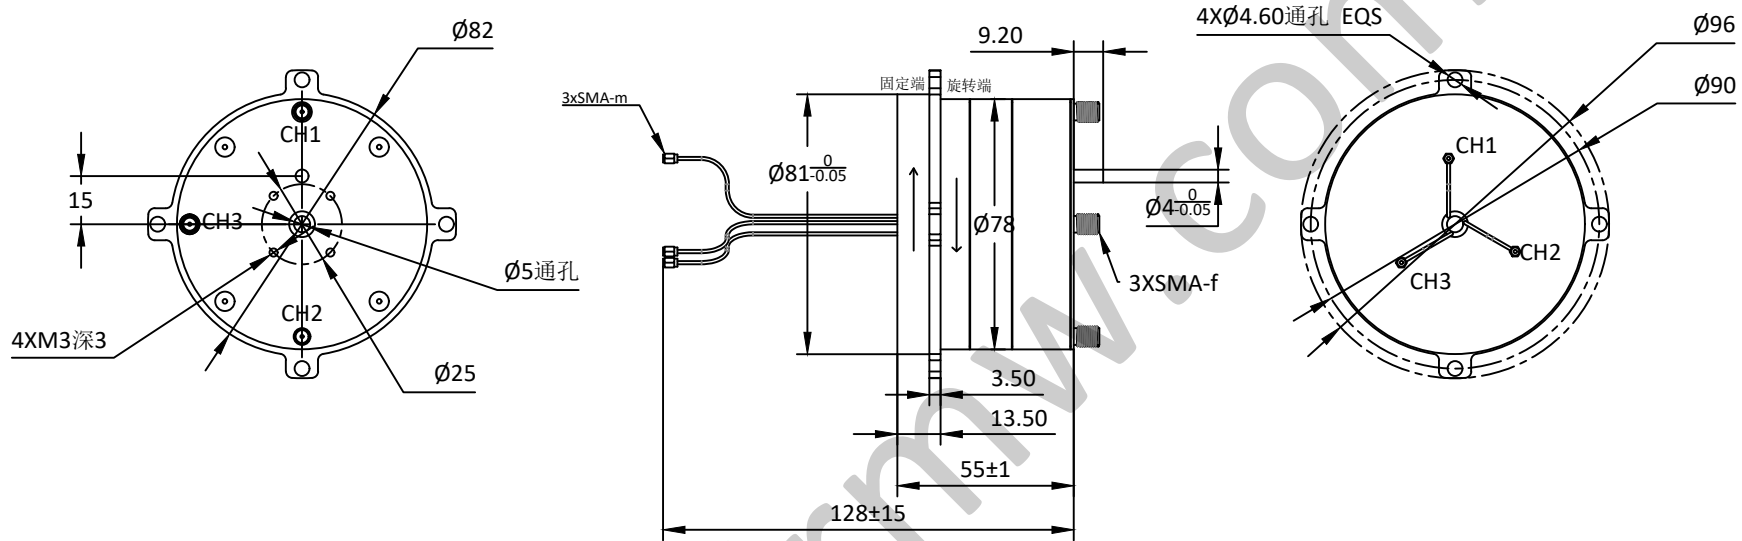

## LRJ-1086

3通道同轴旋转关节 Three Channel Coax Rotary Joint

### —电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2	CH3
工作频率 Frequency Range:	DC - 1.65GHz	DC - 1.65GHz	DC - 1.65GHz
插入损耗 Insertion Loss:	2dB(Max)	2dB(Max)	2dB(Max)
插入损耗最大波动值:	0.15dB	0.15dB	0.15dB
电压驻波比 VSWR:	1.4(Max)	1.4(Max)	1.4(Max)
驻波比最大波动值:	0.2	0.2	0.2
耐功率 Power:	50W(CW) 1.5kW(Peak)	10W(CW) 100W(Peak)	10W(CW) 100W(Peak)

工作温度 Operation Temperature: -40~+70°C


存储温度 Storage Temperature: -55~+85°C

转动速度 Speed: 60rpm(Max)

寿命 Life: 5\*10<sup>6</sup>转(Min)

### —机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-M/F
样式 Type:	/
重量 Weight:	800g

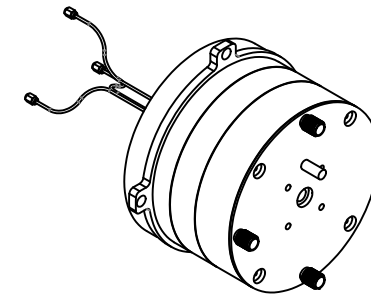

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			莱尔微波 www.lairmw.com sales@lairmw.com	P/N: LRJ-1086	
	Approvals	DATE		THREE CHANNEL COAX ROTARY JOINT 3通道同轴旋转关节	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +05/-02 +10/-03 +15/-03 +20/-03 +25/-03 +30/-03	DRWN			
		ENG			
		CHK	SIZE	CAGE NO	DWG NO.
		Q.A.	A3		
			SCALE	UNIT	SHEET 1 OF 1
			3:2	mm	REV 1