


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

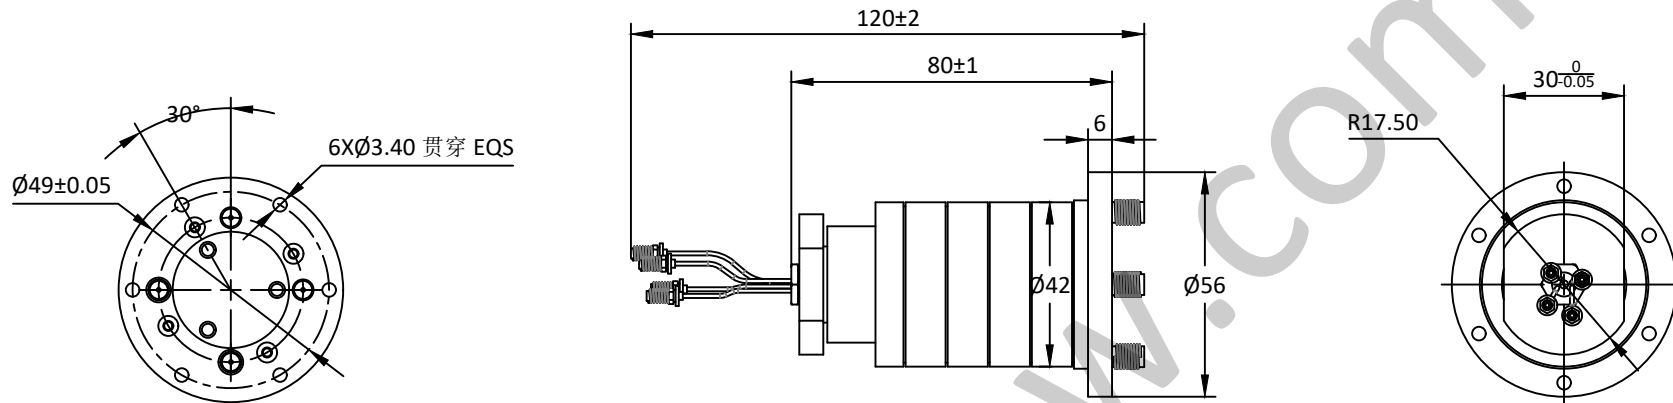


## LRJ-1087

4通道同轴旋转关节 Four Channel Coax Rotary Joint

### —电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2	CH3	CH4
工作频率 Frequency Range:	DC - 4GHz	DC - 4GHz	DC - 4GHz	DC - 4GHz
插入损耗 Insertion Loss:	1.0dB(Max)	1.0dB(Max)	1.0dB(Max)	1.0dB(Max)
插入损耗最大波动值:	0.15dB	0.15dB	0.15dB	0.15dB
电压驻波比 VSWR:	1.6(Max)	1.6(Max)	1.6(Max)	1.6(Max)
驻波比最大波动值:	0.1	0.1	0.1	0.1
耐功率 Power:	1W(CW)	1W(CW)	1W(CW)	1W(CW)
工作温度 Operation Temperature:	-40~+70°C			
存储温度 Storage Temperature:	-55~+85°C			
转动速度 Speed:	30rpm(Max)			
寿命 Life:	5*10 <sup>6</sup> 转(Min)			

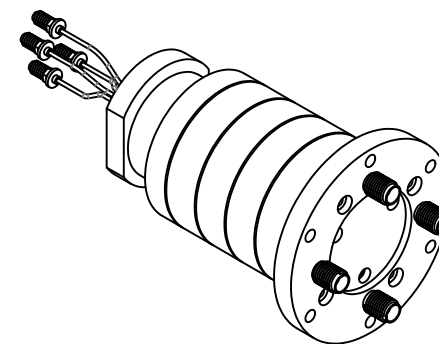

### —机械技术参数 Mechanical Specification—

接口 Connectors: SMA-F(50Ω)@CH1&2&3&4  
样式 Type: /  
重量 Weight: 500g

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LRJ-1087	
HOLE DIAMETER .35 TO 3.20 +.05/-0.2 3.21 TO 6.35 +.10/-0.3 6.36 TO 12.70 +.15/-0.3 12.71 TO 19.05 +.20/-0.3 19.06 TO 25.40 +.25/-0.3 25.41 TO 50.80 +.30/-0.3		TOLERANCES +.05/-0.2 +.10/-0.3 +.15/-0.3 +.20/-0.3 +.25/-0.3 +.30/-0.3		Approvals DATE DRWN ENG CHK Q.A.		FOUR CHANNEL COAX ROTARY JOINT 4通道同轴旋转关节	
		SIZE A3		CAGE NO		DWG NO.	
		SCALE 3:2		UNIT mm		REV 1	
				SHEET 1 OF 1			