


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

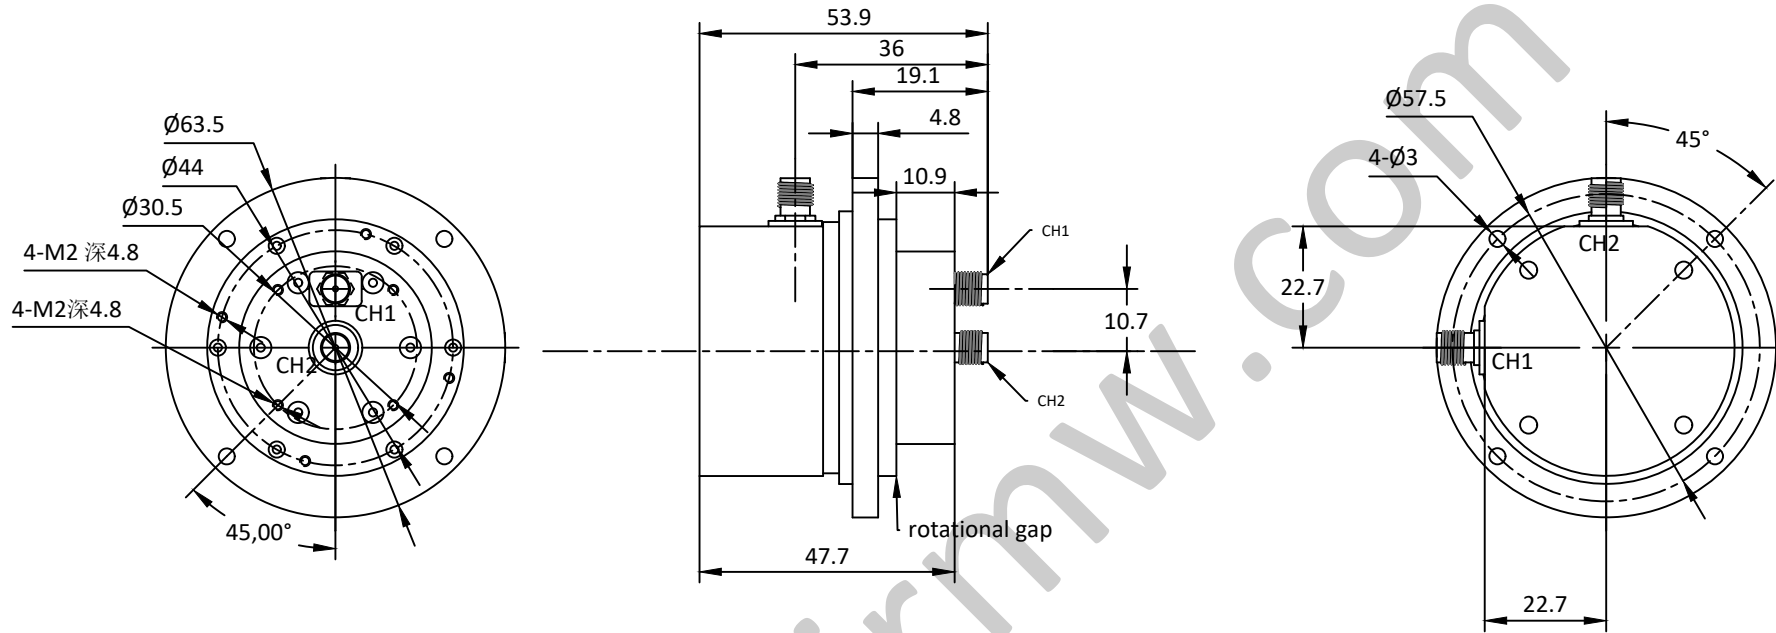


LRJ-1097

2通道旋转关节Dual Channel Rotary Joint —电气技术参数Electrical Specifications—


通道Channel:	CH1	CH2
工作频率 Frequency Range:	10.7 - 12.75GHz	13.75 - 14.5GHz
插入损耗Insertion Loss:	1.0dB(Max)	1.0dB(Max)
插入损耗最大波动值:	0.3dB	0.3dB
电压驻波比VSWR:	1.45(Max)	1.45(Max)
驻波比最大波动值:	0.1	0.1
耐功率Power:	10W(CW)	10W(CW)
工作温度Operation Temperature:	-40~+70°C	/
存储温度Storage Temperature:	-55~+85°C	/
转动速度Speed:	10rpm(Max)	/
寿命Life:	15*10 ⁶ 转(Min)	/

—机械技术参数Mechanical Specification—

接口Connectors:	SMA-F
样式Type:	L
重量Weight:	295g

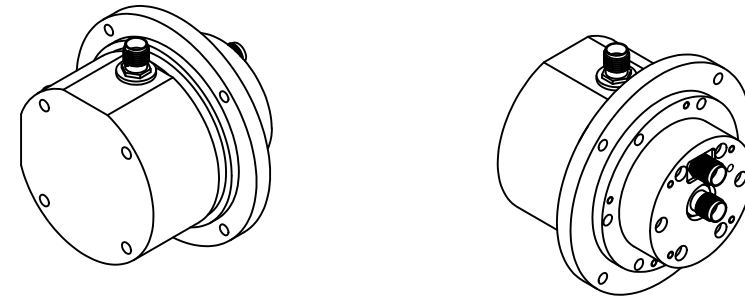

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.XX±0.1 ±1' ±2/5
.XXX±0.012



Approvals

DATE

DRWN

ENG

CHK

Q.A.



www.lairmw.com sales@lairmw.com

P/N: LRJ-1097

DUAL CHANNEL COAX ROTARY JOINT
2通道同轴旋转关节

SIZE	CAGE NO	DWG NO.	REV
A3			1
SCALE	UNIT	SHEET 1 OF 1	
3:2	mm		

HOLE DIAMETER	TOLERANCES
.35 TO 3.20	+.05/-0.2
3.21 TO 6.35	+.10/-0.3
6.36 TO 12.70	+.15/-0.3
12.71 TO 19.05	+.20/-0.3
19.06 TO 25.40	+.25/-0.3
25.41 TO 50.80	+.30/-0.3