


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

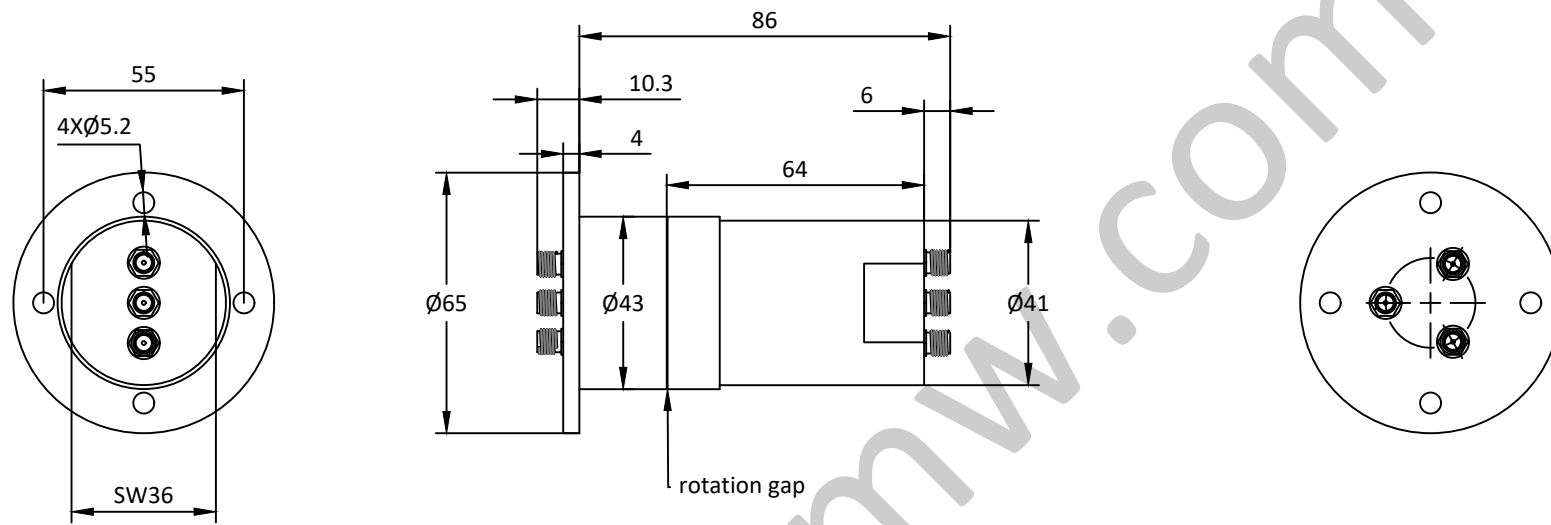

LRJ-1085

3通道同轴旋转关节 Three Channel Coax Rotary Joint


—电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2	CH3
工作频率 Frequency Range:	DC - 18GHz	DC - 3GHz	DC - 3GHz
插入损耗 Insertion Loss:	1.5dB(Max)	1.0dB(Max)	1.0dB(Max)
插入损耗最大波动值:	0.3dB	0.15dB	0.15dB
电压驻波比 VSWR:	1.6(Max)	1.5(Max)	1.5(Max)
驻波比最大波动值:	0.1	0.2	0.2
耐功率 Power:	10W(CW)	10W(CW)	10W(CW)

工作温度 Operation Temperature:	-45~+70°C
存储温度 Storage Temperature:	-55~+85°C
转动速度 Speed:	30rpm(Max)
寿命 Life:	5*10 ⁶ 转 (Min)

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-F
样式 Type:	/
重量 Weight:	/

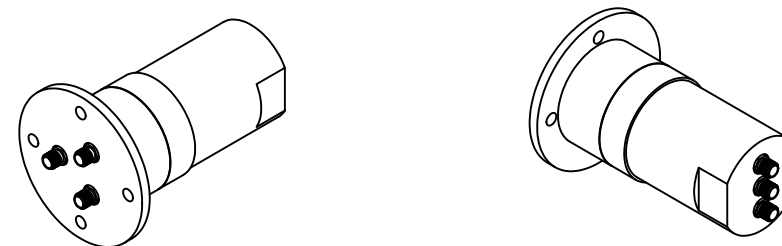

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 .XXX±0.012					P/N: LRJ-1085	
	Approvals: _____ DATE: _____		www.lairmw.com sales@lairmw.com			
DRWN: _____ ENG: _____ CHK: _____ Q.A.: _____			THREE CHANNEL COAX ROTARY JOINT 3通道同轴旋转关节			
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/-0.2 +.10/-0.3 +.15/-0.3 +.20/-0.3 +.25/-0.3 +.30/-0.3		SIZE: A3	CAGE NO: _____	DWG NO.: _____
		SCALE: 3:2		UNIT: mm	SHEET 1 OF 1	
				REV: 1		