
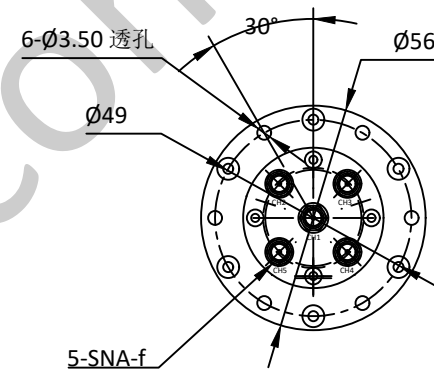
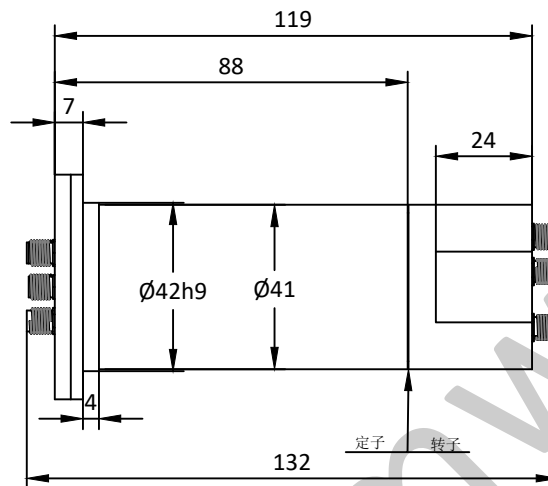


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

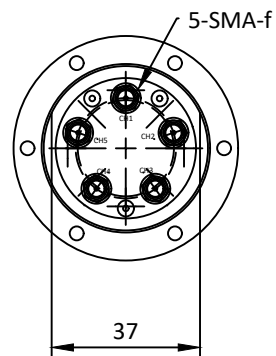

## LRJ-1090


5通道同轴旋转关节 Five Channel Coax Rotary Joint

### —电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2	CH3	CH4	CH5
工作频率 Frequency Range:	DC - 5GHz	DC - 5GHz	DC - 5GHz	DC - 5GHz	DC - 5GHz
插入损耗 Insertion Loss:	1.5dB(Max)	1.0dB(Max)	1.0dB(Max)	1.0dB(Max)	1.0dB(Max)
插入损耗最大波动值:	0.15dB	0.15dB	0.15dB	0.15dB	0.15dB
电压驻波比 VSWR:	1.5(Max)	1.5(Max)	1.5(Max)	1.5(Max)	1.5(Max)
驻波比最大波动值:	0.1	0.1	0.1	0.1	0.1
耐功率 Power:	30W(CW)	10W(CW)	10W(CW)	10W(CW)	10W(CW)
	/	/	/	/	/
工作温度 Operation Temperature:	-40~+70°C				
存储温度 Storage Temperature:	-55~+85°C				
转动速度 Speed:	30rpm(Max)				
寿命 Life:	5*10 <sup>6</sup> 转(Min)				

### —机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-F(50Ω)@CH1&2&3&4&5
样式 Type:	/
重量 Weight:	750g



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LRJ-1090	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +0.05/-0.02 +0.10/-0.03 +0.15/-0.03 +0.20/-0.03 +0.25/-0.03 +0.30/-0.03		Approvals DATE DRWN ENG CHK Q.A.		Five CHANNEL COAX ROTARY JOINT 5通道同轴旋转关节	
				SIZE A3	CAGE NO	DWG NO.	REV 1
				SCALE 3:2	UNIT mm	SHEET 1 OF 1	