


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

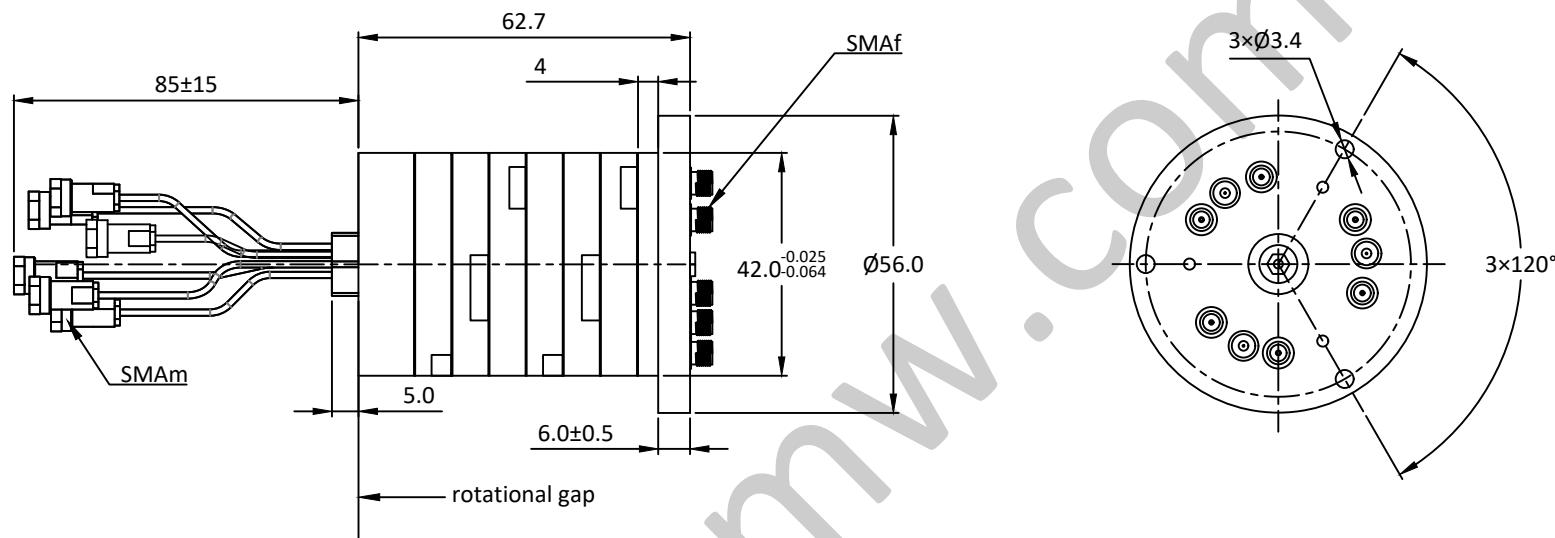

LRJ-1040

6通道旋转关节 SIX Channel Rotary Joint
—电气技术参数 Electrical Specifications—


通道 Channel:	CH1-6
工作频率 Frequency Range:	DC- 3GHz
插入损耗 Insertion Loss:	0.7dB@DC-2.5GHz/1.0@2.5-3.0GHz
插入损耗最大波动值:	0.2dB@DC-2.5GHz/0.5dB@2.5-3.0GHz
电压驻波比 VSWR:	1.7@DC-2.5GHz/2.4@2.5-3.0GHz
驻波比最大波动值:	0.5@DC-2.5GHz/1.0@2.5-3.0GHz
耐功率 Power	50W@DC-1.0GHz/35W@1.0-2.5GHz/25W@2.5-3.0GHz(CW)
	1kW(Peak)
工作温度 Operation Temperature:	-40~+85°C
存储温度 Storage Temperature:	-55~+85°C
转动速度 Speed:	60rpm(Max)
寿命 Life:	1*10 ⁶ 转(Min)

—机械技术参数 Mechanical Specification—

接口 Connectors:	SMA-M/F
样式 Type:	I
重量 Weight:	250g

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.XX±0.03 ±1' ±2/5
.XXX±0.012

HOLE DIAMETER	TOLERANCES
.35 TO 3.20	+05/-02
3.21 TO 6.35	+10/-03
6.36 TO 12.70	+15/-03
12.71 TO 19.05	+20/-03
19.06 TO 25.40	+25/-03
25.41 TO 50.80	+30/-03



Approvals

DATE

DRWN

ENG

CHK

Q.A.



www.lairmw.com sales@lairmw.com

P/N: LRJ-1040

SIX CHANNEL COAX ROTARY JOINT
6通道同轴旋转关节

SIZE	CAGE NO	DWG NO.	REV
A3			1
SCALE	UNIT	SHEET 1 OF 1	
3:2	mm		