


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

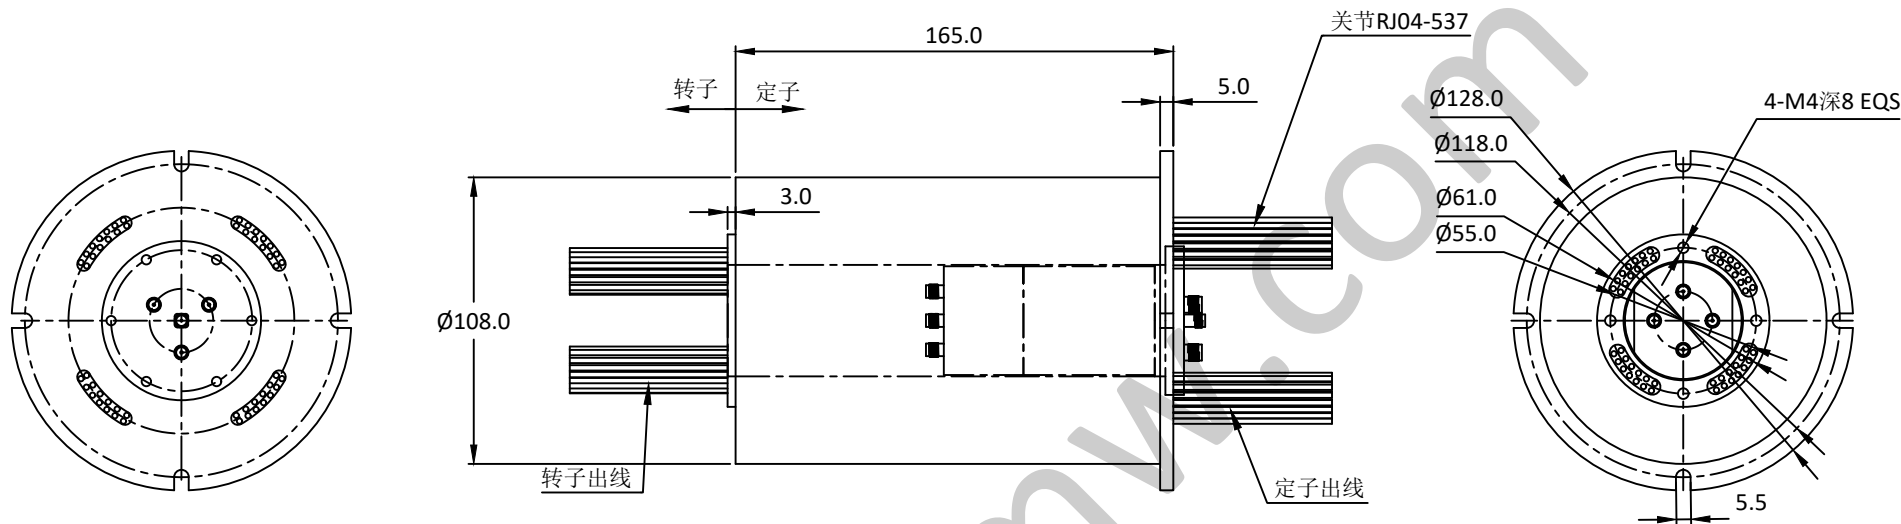

LRJ-1111


—电气技术参数Electrical Specifications—

通道Channel:	CH1	CH2	CH3	CH4
工作频率 Frequency Range:	1 - 4GHz	1 - 4GHz	1 - 4GHz	1 - 4GHz
插入损耗Insertion Loss:	1.0dB(Max)	1.0dB(Max)	1.0dB(Max)	1.0dB(Max)
插入损耗最大波动值:	0.1dB	0.15dB	0.15dB	0.15dB
电压驻波比VSWR:	1.3(Max)	1.5(Max)	1.5(Max)	1.5(Max)
驻波比最大波动值:	0.1	0.1	0.1	0.1
耐功率Power:	50W(CW)	10W(CW)	10W(CW)	10W(CW)
工作温度Operation Temperature:	-40~+70 C			
存储温度Storage Temperature:	-55~+85 C			
转动速度Speed:	30rpm(Max)			
寿命Life:	5*10 ⁶ 转(Min)			

—机械技术参数Mechanical Specification—

接口Connectors:	SMA-F@CH1&2&3&4
样式Type:	/
重量Weight:	400g

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.X±0.1 ±1' ±2/5
.XX±0.03
.XXX±0.012



Approvals

DATE

DRWN

ENG

CHK

Q.A.



P/N: LRJ-1111

滑环关节组合

SIZE	CAGE NO	DWG NO.	REV
A3			1
SCALE	UNIT	SHEET 1 OF 1	
3:2	mm		