


**型号 Cable Type: LCC-CN034**

.034" 低温半钢射频同轴电缆

.034" Cryogenic Coaxial Cable

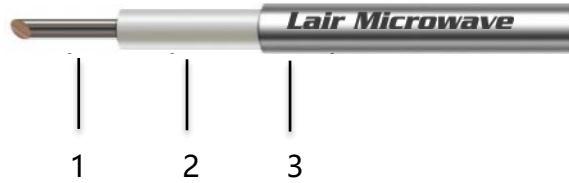

结构 Construction	材料 Materials	尺寸 O.D (mm)
1.内导体 Inner Conductor	镀银铜镍合金 Silver-plated CuNi	0.21±0.015
2.介质层 Dielectric	聚四氟乙烯 PTFE	0.61±0.03
3.外导体 Outer Conductor	铜镍合金 CuNi	0.86±0.03

**电气性能 Electrical Specifications**

工作频率 Operating Frequency	18 GHz
截止频率 Cutoff Frequency	168 GHz
特性阻抗 Impedance	50 Ω
传播速率 Velocity	77%
屏蔽效率 Shielding Efficiency	165 dB
耐压 Withstanding Voltage	100 V, DC

**机械环境性能 Mechanical & Environmental Specifications**

最小弯曲半径 Minimum Bend Radius	4.3 mm
重量 Weight	3.4 Kg/KM
温度范围 Operating Temperature	5K - 423K

**衰减典型值 Attenuation (Typical Value @ 25°C & Sea Level)**

频率 Frequency (MHz)	衰减 Attenuation (dB/100m)
1000	316.7
2000	449.7
3000	552.4
6000	786.5
8000	911.4
10000	1022.2
12400	1142.0
16000	1303.0
18000	1385.1