


型号 Cable Type : LK141

LK系列超低损耗稳幅稳相半钢电缆

LK Series Ultra-low Loss Semi-rigid Cable

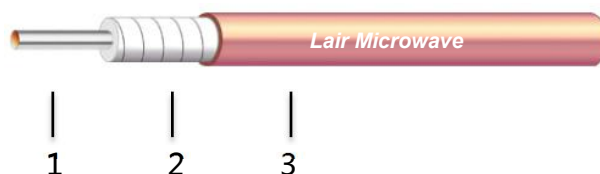

结构 Construction	材料 Materials	尺寸 O.D (mm)
1.中心导体 Center Conductor	镀银铜 Silvered Copper	1.05
2.绝缘层 Dielectric	低密度聚四氟乙烯 Low Density PTFE	3.00
3.外导体 Outer Conductor	镀三元合金无缝退火紫铜管 Ternary Alloy Plated Seamless Annealed Bare Copper Tube	3.58

电气性能 Electrical Specifications

阻抗 Cable Impedance	50 Ω
速率 Velocity	81%
屏蔽效率 Shielding Effectiveness	>165 dB
耐电压 Voltage Withstanding	1000 V DC
工作频率 Operating Frequency	DC-26.5 GHz

机械环境性能 Mechanical & Environmental Specifications

重量 Weight	45 g/m
弯曲半径 Bend Radius	13.5 mm
温度范围 Temperature Range	-55 ~ +250 $^{\circ}\text{C}$

衰减典型值 Attenuation (Typical Value @ 25 $^{\circ}\text{C}$ & Sea Level)

频率 Frequency (MHz)	功率 Power (W)	衰减 Attenuation (dB/m)
300	1073	0.17
1000	584	0.31
3000	334	0.54
6000	234	0.77
8500	195	0.92
12400	160	1.13
18000	132	1.37
26500	107	1.68