

D系列 18GHz超低损耗稳幅稳相电缆组件

D-series 18GHz Ultra Low Loss Phase Stable Cable Assembly


产品规格书
Specification

产品型号 Part No.

D18-SMSM-L



外形图 Outline

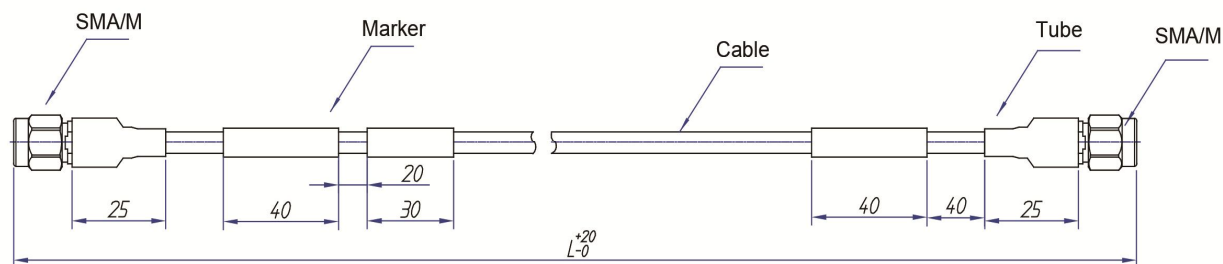

电气性能 Electrical Characteristics

工作频率 Frequency	DC - 18 GHz
特性阻抗 Impedance	50 Ω
绝缘电阻 Insulation Resistance	5000 mΩ
介质耐压 Dielectric Withstanding Voltage	2000 V
屏蔽效率 Shielding Effectiveness	≥90 dB
传播速率 Velocity of Propagation	83%
电压驻波比 VSWR	1.30 Max
温度相位稳定性 Phase Stability vs. Temperature	≤550 PPM (-55°C ~ +85°C)
弯曲相位稳定性 Phase Stability vs. Flexure	≤±2°
弯曲幅度稳定性 Amplitude stability	≤0.05 dB

机械与环境性能 Mechanical and Environmental Characteristics

电缆外径 Cable Diameter	7.8mm
最小弯曲半径 Min. Bend Radius	78 mm
工作温度 Operating Temperature Range	-55°C ~ +165°C

组件衰减指标 Attenuation

Part No.	3GHz	6GHz	12GHz	18GHz
D18-SMSM-0.5M	0.199 dB	0.283 dB	0.410 dB	0.505 dB
D18-SMSM-1.0M	0.329 dB	0.468 dB	0.680 dB	0.840 dB
D18-SMSM-1.5M	0.459 dB	0.653 dB	0.950 dB	1.175 dB
D18-SMSM-2.0M	0.589 dB	0.838 dB	1.220 dB	1.510 dB
D18-SMSM-3.0M	0.849 dB	1.208 dB	1.760 dB	2.180 dB
D18-SMSM-5.0M	1.369 dB	1.948 dB	2.840 dB	3.520 dB

连续波功率 CW Power (sea level / 25°C)	1030 W	717 W	497 W	399 W
------------------------------------	--------	-------	-------	-------

注：电缆组件接头和长度可接受定制 Different connector types and the lengths of D series cable assembly are available.

In the effort to improve our products, Lair Microwave reserves the right to make changes judged to be necessary.

Tel: +86-512-66226676 Fax: +86-512-67564409 E-mail: sales@lairmw.com @ Designed by Lair Microwave