

D系列 26.5GHz超低损耗稳幅稳相电缆组件

D-series 26.5GHz Ultra Low Loss Phase Stable Cable Assembly


产品规格书
Specification

产品型号 Part No.

D26-3.5M3.5F-L



外形图 Outline

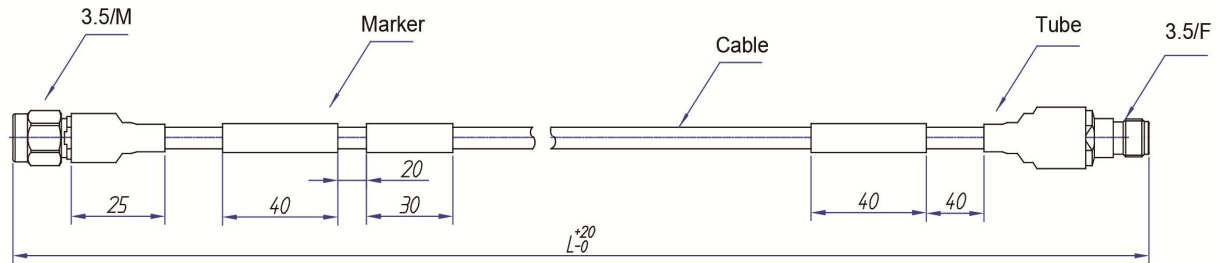

电气性能 Electrical Characteristics

工作频率 Frequency	DC - 26.5 GHz
特性阻抗 Impedance	50 Ω
绝缘电阻 Insulation Resistance	5000 mΩ
介质耐压 Dielectric Withstanding Voltage	1500 V
屏蔽效率 Shielding Effectiveness	≥90 dB
传播速率 Velocity of Propagation	83%
电压驻波比 VSWR	1.30 Max
温度相位稳定性 Phase Stability vs. Temperature	≤550 PPM (-55°C ~ +85°C)
弯曲相位稳定性 Phase Stability vs. Flexure	≤±2°
弯曲幅度稳定性 Amplitude stability	≤0.05 dB

机械与环境性能 Mechanical and Environmental Characteristics

电缆外径 Cable Diameter	5.1mm
最小弯曲半径 Min. Bend Radius	51 mm
工作温度 Operating Temperature Range	-55°C ~ +165°C

组件衰减指标 Attenuation

Part No.	6GHz	12GHz	18GHz	26.5GHz
D26-3.5M3.5F-0.5M	0.393 dB	0.560 dB	0.690 dB	0.850 dB
D26-3.5M3.5F-1.0M	0.688 dB	0.980 dB	1.210 dB	1.490 dB
D26-3.5M3.5F-1.5M	0.983 dB	1.400 dB	1.730 dB	2.130 dB
D26-3.5M3.5F-2.0M	1.278 dB	1.820 dB	2.250 dB	2.770 dB
D26-3.5M3.5F-3.0M	1.868 dB	2.660 dB	3.290 dB	4.050 dB
D26-3.5M3.5F-5.0M	3.048 dB	4.340 dB	5.370 dB	6.610 dB

连续波功率 CW Power (sea level / 25°C)	368 W	256 W	207 W	169 W
------------------------------------	-------	-------	-------	-------

注：电缆组件接头和长度可接受定制 Different connector types and the lengths of D series cable assembly are available.

In the effort to improve our products, Lair Microwave reserves the right to make changes judged to be necessary.

Tel: +86-512-66226676 Fax: +86-512-67564409 E-mail: sales@lairmw.com @ Designed by Lair Microwave