

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LAP-1027


32 – 38 GHz 功率放大器 Power Amplifier

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	32 – 38 GHz
增益 Gain:	35dB
输出 P _{1dB} Output P _{1dB} :	31dBm
饱和输出功率 Psat:	32dBm
输入驻波比 Input VSWR:	1.5:1
输出驻波比 Output VSWR:	/
直流偏置电压 DC Power Supply:	+24V
直流偏置电流 DC Current Supply:	700mA
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-50 ~ +105°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	2.92mm-F
输出连接器 Output Interface:	2.92mm-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

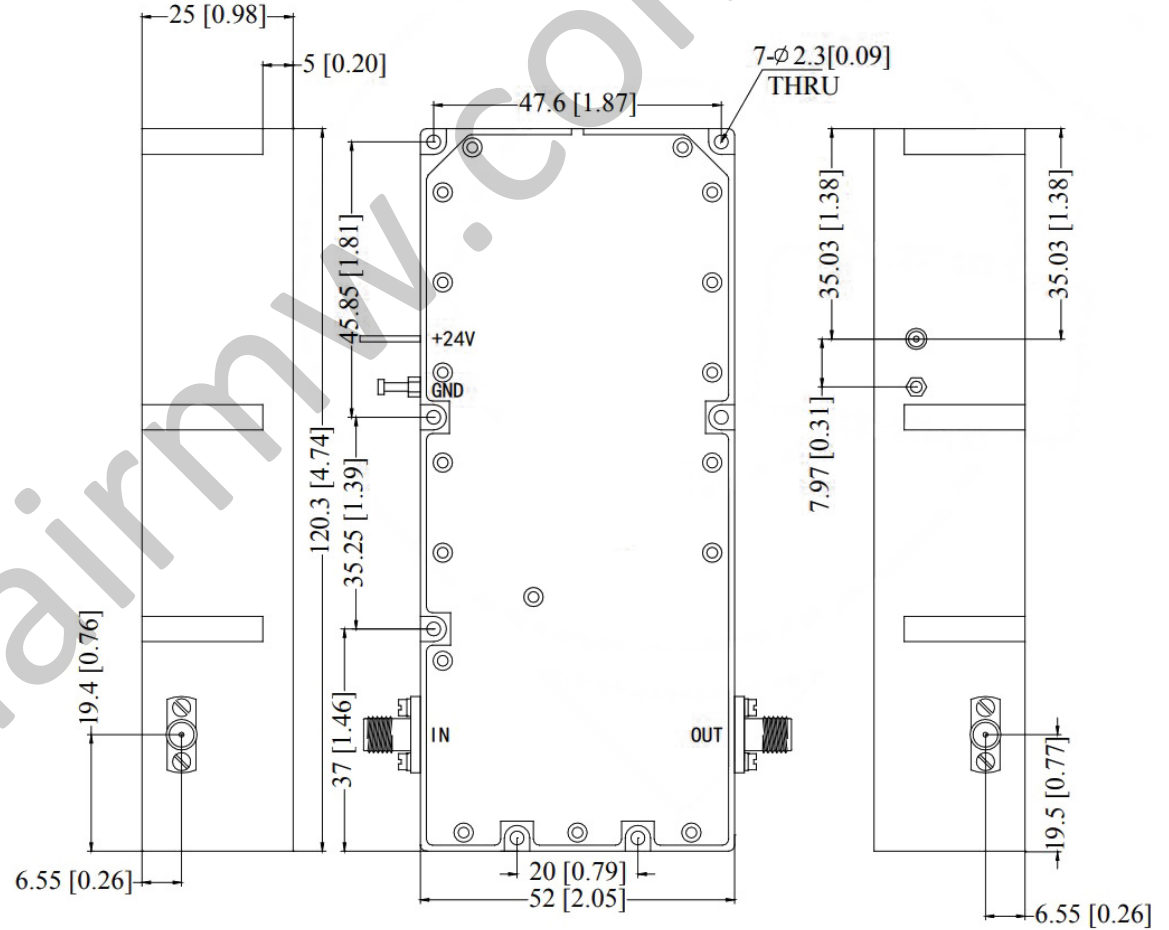

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012				莱尔微波 www.lairmw.com sales@lairmw.com		P/N: LAP-1027																	
<table border="1"> <tr> <td>DRWN</td> <td>DATE</td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		DRWN	DATE	ENG		CHK		Q.A.		<table border="1"> <tr> <td colspan="2">32 - 38GHz 功率放大器 Power Amplifier 增益 Gain 35dB</td> </tr> <tr> <td>SIZE A3</td> <td>CAGE NO</td> </tr> <tr> <td>SCALE 3:2</td> <td>UNIT mm</td> </tr> </table>		32 - 38GHz 功率放大器 Power Amplifier 增益 Gain 35dB		SIZE A3	CAGE NO	SCALE 3:2	UNIT mm	<table border="1"> <tr> <td>DWG NO.</td> <td>REV 1</td> </tr> <tr> <td colspan="2">SHEET 1 OF 1</td> </tr> </table>		DWG NO.	REV 1	SHEET 1 OF 1	
DRWN	DATE																						
ENG																							
CHK																							
Q.A.																							
32 - 38GHz 功率放大器 Power Amplifier 增益 Gain 35dB																							
SIZE A3	CAGE NO																						
SCALE 3:2	UNIT mm																						
DWG NO.	REV 1																						
SHEET 1 OF 1																							