

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY


REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LAP-1035

2 – 6 GHz 功率放大器 Power Amplifier

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	2 – 6 GHz
增益 Gain:	55dB
输出 P _{1dB} Output P _{1dB} :	43dBm
饱和输出功率 Psat:	47dBm
输入驻波比 Input VSWR:	1.6:1
输出驻波比 Output VSWR:	/
直流偏置电压 DC Power Supply:	+28V
直流偏置电流 DC Current Supply:	6000mA
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-50 ~ +105°C

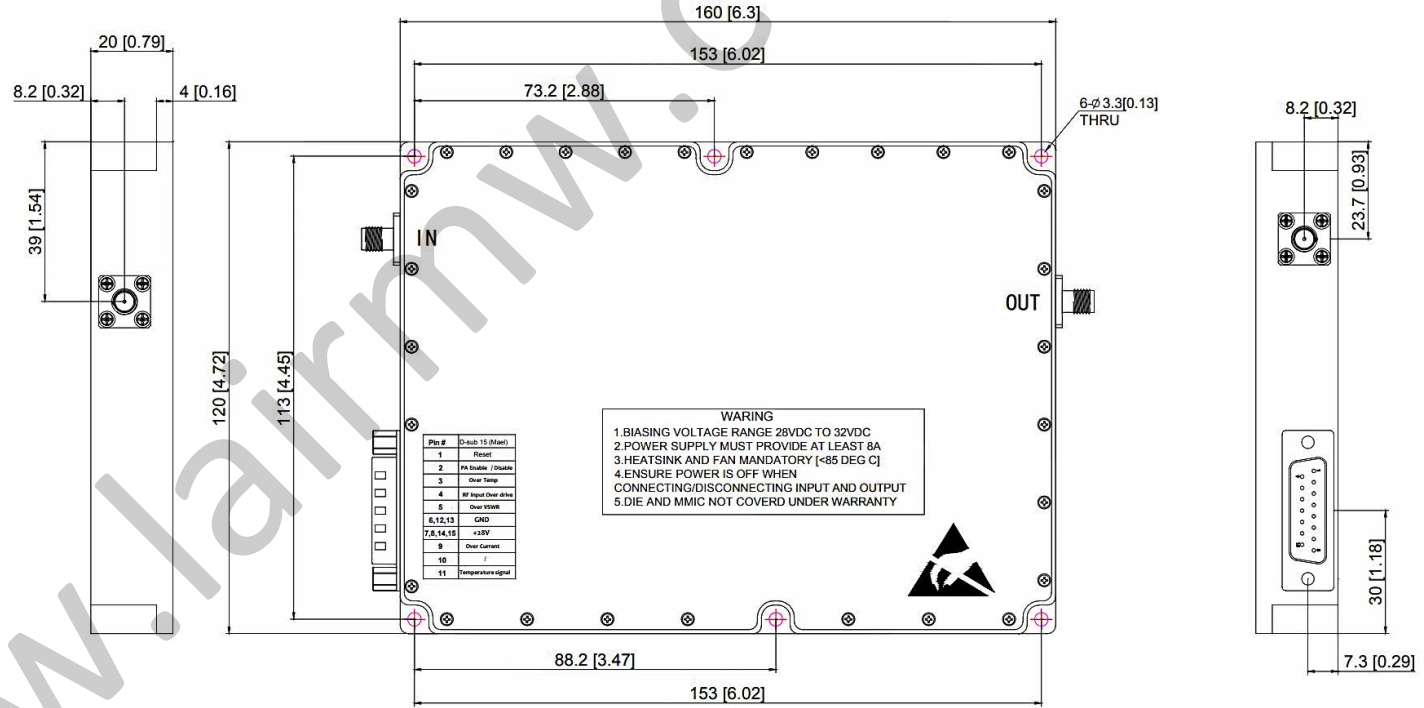

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LAP-1035																			
<table border="1"> <tr> <td>DRWN</td> <td>DATE</td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		DRWN	DATE	ENG		CHK		Q.A.		<table border="1"> <tr> <td colspan="2">2 - 6GHz 功率放大器 Power Amplifier 增益 Gain 50dB</td> </tr> <tr> <td>SIZE A3</td> <td>CAGE NO</td> </tr> <tr> <td>SCALE 3:2</td> <td>UNIT mm</td> </tr> </table>		2 - 6GHz 功率放大器 Power Amplifier 增益 Gain 50dB		SIZE A3	CAGE NO	SCALE 3:2	UNIT mm	<table border="1"> <tr> <td colspan="2">DWG NO.</td> <td>REV 1</td> </tr> <tr> <td colspan="3">SHEET 1 OF 1</td> </tr> </table>		DWG NO.		REV 1	SHEET 1 OF 1		
DRWN	DATE																								
ENG																									
CHK																									
Q.A.																									
2 - 6GHz 功率放大器 Power Amplifier 增益 Gain 50dB																									
SIZE A3	CAGE NO																								
SCALE 3:2	UNIT mm																								
DWG NO.		REV 1																							
SHEET 1 OF 1																									