

67-87GHz Medium Power Amplifier 功率放大器



描述Description

The LAP-6002 is a medium power amplifier which operates between 67 and 87 GHz.

特点Feature


- High Output Power
- Broad Band
- High Gain

产品规格Specifications

RF Frequency [GHz]	67 - 87
Gain [dB (typ)]	16
Return Loss[dB (typ)]	4
Psat[dBm (typ)]	14
RF Port	WR12 (UG387/UM)
DC Voltage (typ) [V]	+7
Max. DC Voltage [V]	+9
Max. Input Power [dBm]	/
壳温Max. Case Temperature [C]	+45

典型性能Typical Performance

Saturated Output Power

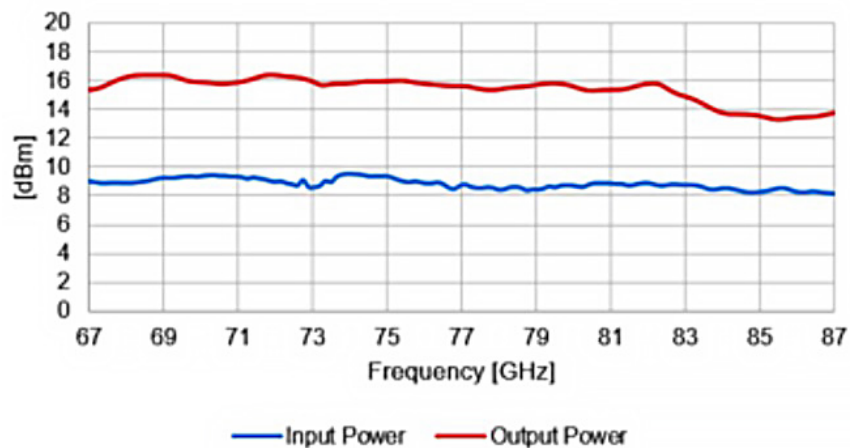

67-87GHz Medium Power Amplifier
功率放大器

典型性能 Typical Performance

