


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

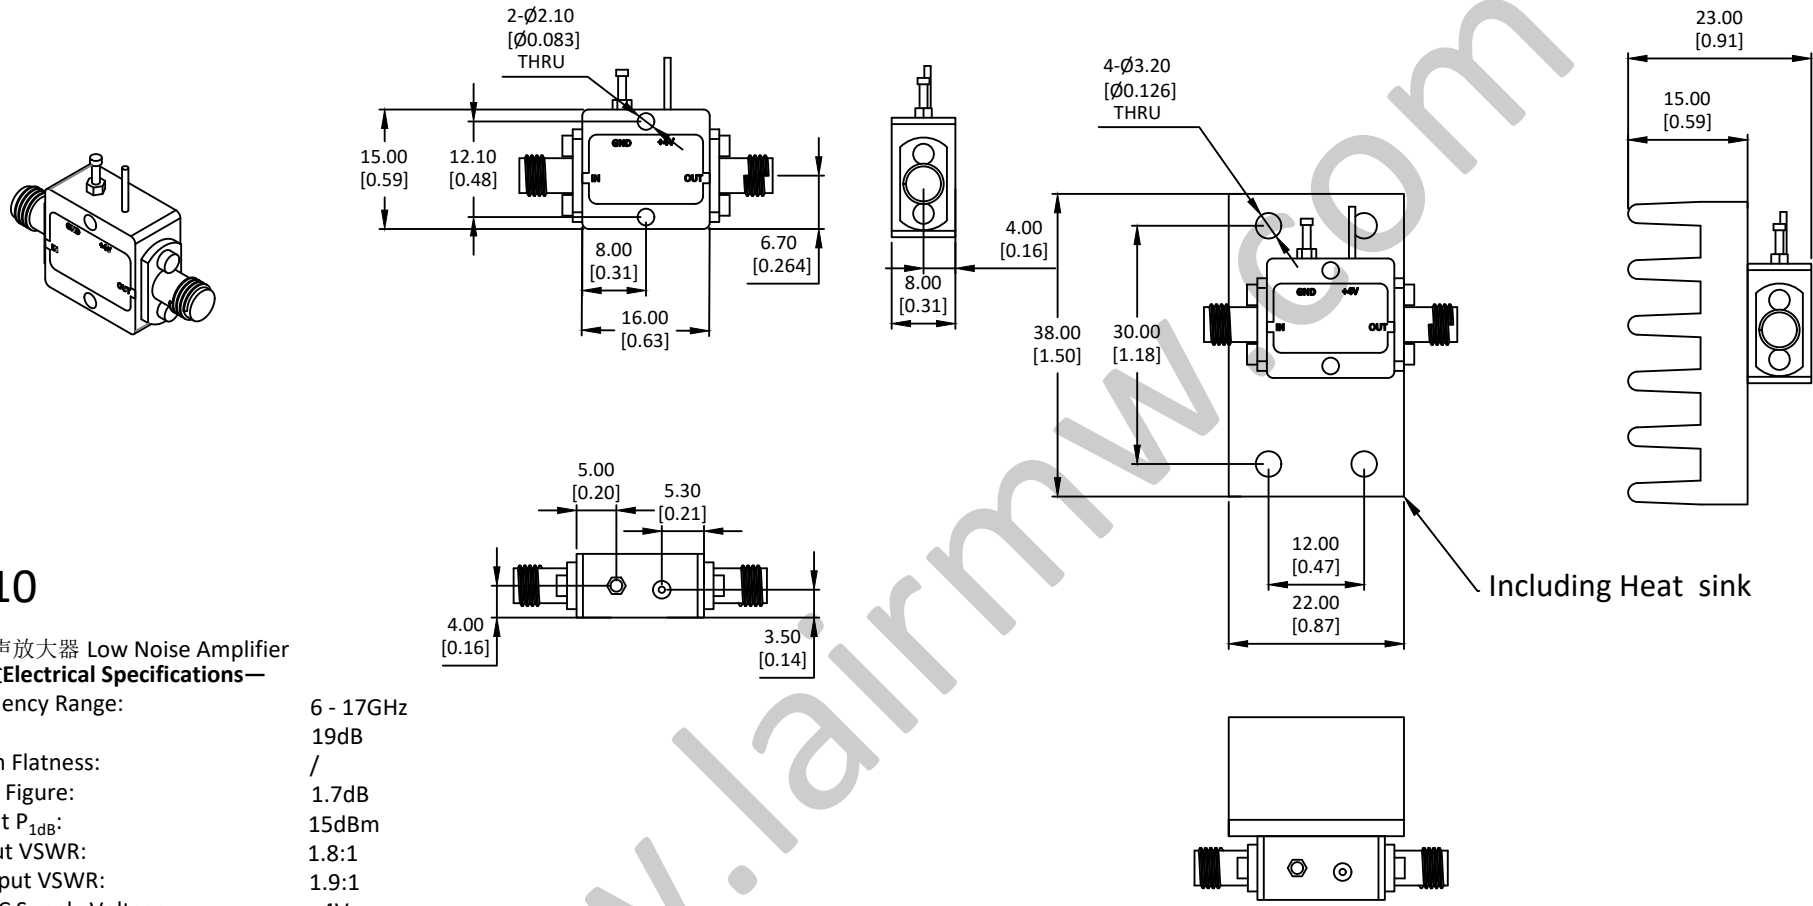

LAL-1110

6~17GHz 低噪声放大器 Low Noise Amplifier

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	6 - 17GHz
增益 Gain:	19dB
增益平坦度 Gain Flatness:	/
噪声系数 Noise Figure:	1.7dB
输出 P _{1dB} Output P _{1dB} :	15dBm
输入驻波比 Input VSWR:	1.8:1
输出驻波比 Output VSWR:	1.9:1
直流偏置电压 DC Supply Voltage:	+4V
直流偏置电流 DC Supply Current:	90mA
工作温度 Operation Temperature:	-40~+85℃
存储温度 Storage Temperature:	-50~+105℃

—机械技术参数 Mechanical Specification—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012		 www.lairm.com sales@lairm.com	P/N: LAL-1110							
			6-17GHz 低噪声放大器 Low Noise Amplifier 增益 Gain 19dB, 噪声系数 NF 1.7dB							
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03	DRWN	ENG	CHK	Q.A.	DATE	SCALE 3:2	CAGE NO	DWG NO.	REV 1
			SCALE 3:2		UNIT mm		SHEET 1 OF 1			