

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LMA-5027


180 – 186 MHz 有源五倍频器 Active Frequency Quintupler

—电气技术参数 Electrical Specifications—

输入频率范围 Input Frequency Range:	180 – 186MHz
输出频率范围 Output Frequency Range:	900 – 930MHz
输入功率 Input Power:	0dBm
输出功率 Input Power:	+2dBm
谐波抑制 F0 Harmonic Suppression F0:	60dB
输入驻波比 Input VSWR:	1.05:1
输出驻波比 Output VSWR:	2.0:1
直流偏置电压 DC Power Supply:	12V
直流偏置电流 DC Current Supply:	150mA
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-55 ~ +105°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

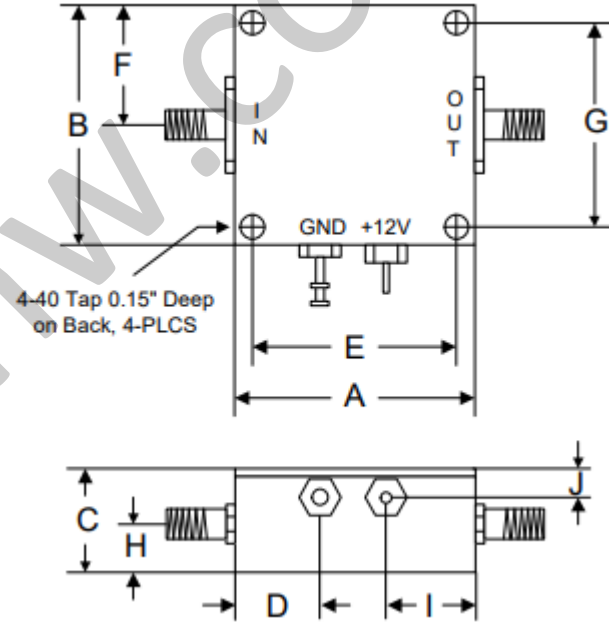

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			 莱尔微波 Laird Microwave www.lairmw.com sales@lairmw.com	P/N: LMA-5027	
	Approvals	DATE		180 – 186 MHz Active Frequency Quintupler	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	ENG	CHK	Q.A.
SIZE A3			CAGE NO	DWG NO.	REV 1
SCALE 3:2			UNIT mm	SHEET 1 OF 1	