

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LSN-0004


820 – 960 MHz 功分/合路器 Power Splitter/Combiner

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	820 – 960 MHz
隔离度 Isolation:	23dB
插入损耗 Insertion Loss Above 3dB:	0.5dB
相位不平衡 Phase Unbalance:	0.5°
幅度不平衡 Amplitude Unbalance:	0.05dB
输入驻波比 Input VSWR:	1.4:1
输出驻波比 Output VSWR:	1.2:1
最大输入功率 Maximum Input Power:	+30dBm
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-65 ~ +150°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

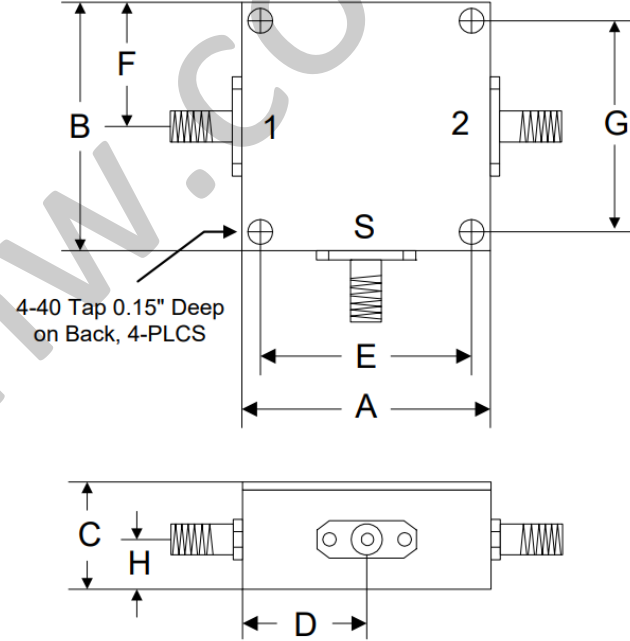

	A	B	C	D	E	F	G	H
Inch	1.250	1.250	0.563	0.625	1.000	0.625	1.000	0.250
mm	31.75	31.75	14.29	15.88	25.40	15.88	25.40	6.35

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.01 ±1° ±2/5 .XXX±0.012					 www.lairmw.com sales@lairmw.com	P/N: LSN-0004			
	Approvals	DATE				820 – 960 MHz Power Splitter/Combiner			
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	ENG	CHK	Q.A.	SIZE A3	CAGE NO	DWG NO.	REV 1
						SCALE 3:2	UNIT mm	SHEET 1 OF 1	