

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LSN-2008

0.5 – 2 GHz 功分/合路器 Power Splitter/Combiner

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range: 0.5 – 2GHz

隔离度 Isolation: 19dB

插入损耗 Insertion Loss: 3.9dB

相位平衡 Phase Balance: $\pm 4^\circ$

幅度平衡 Amplitude Balance: $\pm 0.05\text{dB}$

输入驻波比 Input VSWR: 1.4:1

输出驻波比 Output VSWR: 1.4:1

最大输入功率 Maximum Input Power: 43dBm

工作温度 Operation Temperature: $-40 \sim +85^\circ\text{C}$

存储温度 Storage Temperature: $-65 \sim +125^\circ\text{C}$

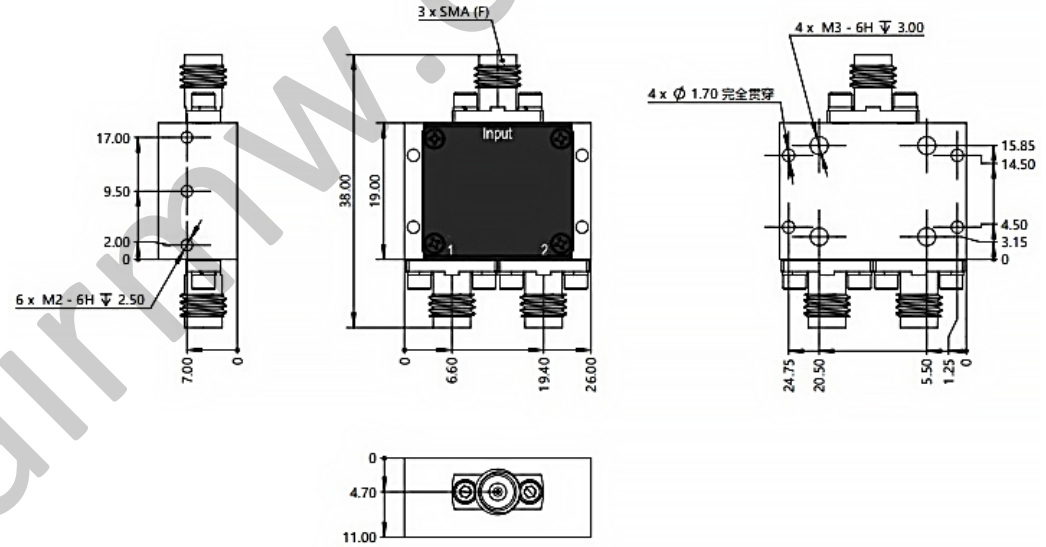
—机械技术参数 Mechanical Specifications—



输入连接器 Input Interface: SMA-F

输出连接器 Output Interface: SMA-F

尺寸 Size(excluding connectors) : 19x26x11mm

重量 Weight: 18.6g



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012					P/N: LSN-2008		
			www.lairmw.com sales@lairmw.com		0.5 - 2 GHz Power Splitter/Combiner		
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	DATE	SIZE A3	CAGE NO	DWG NO.	REV 1
		ENG		SCALE 3:2	UNIT mm	SHEET 1 OF 1	
		CHK					
		Q.A.					